


# TUG 1



The 220W motor is equipped with an electromagnetic brake that stops the Tug 1 even while on ramps at full load. Due to the equipped differential with oil bath gear transmission, gel batteries, and the non-marking tyres of 360mm, maintenance on this vehicle is reduced. The Tug 1 features standard and customisable hitches making this vehicle incredibly versatile.

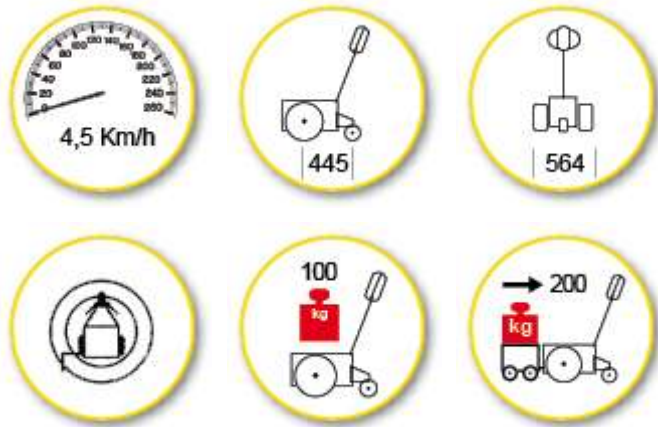

SPECIFICATIONS	Tug-1
Capacity	100kg
Trailing Cap on flat surface	200kg
Overall length	605mm
Width between wheels	400mm
Frame height	433mm
Weight	62.5kg
Motor	24 Volt
Gear driven transmission	Diff. in oil bath
Forward speed	max 4.5 km/h
Reverse speed	max 4.5km/h
Batteries	26 amp
Battery charger	Included





**HERCULES**  
COMPLETE LIFTING SOLUTIONS

# TUG 1 ACCESSORIES



**Trailer Hitch**



**Galvanised Bin Hitch**



**Tug 1 Galvanised Hitch**




**Basket 550x650xh160**



**Ballasts**



**Galvanised Hitch M Series**

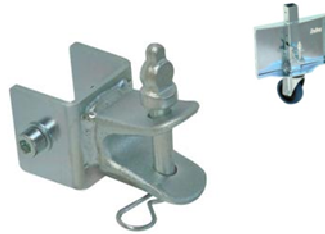

**Accessories Hook M Series**

Hercules Complete Lifting Solutions  
Unit 2, 18 Hotham Parade  
ARTARMON NSW 2064  
Toll Free: 1800 649 603  
Ph: (02) 9966 5600 Fax: (02) 9966 5622  
info@hercules.com.au  
www.hercules.com.au